



Breakaways

BWC Breakaways are Used for Connecting between the hose and the nozzle. 2x Integral Check valves and if the pull is too strong, the breakaway will be broken and closed automatically to avoid the fuel flowing.

Maximum Pull: 3/4": 250LBS±0.5%

1": 300LBS±0.5%

Flow Range: 3/4": 0~ 60L/min

1": 0~ 60L/min

BWC07 3/4"

Package: 100pcs/carton

Net Weight: 23kgs

Gross Weight: 25kgs

Dimension: 520×280×280mm

BWC10 1"

Package: 100pcs/carton


Net Weight: 28kgs

Gross Weight: 30kgs

Dimension: 520×280×280mm



BWC Breakaways

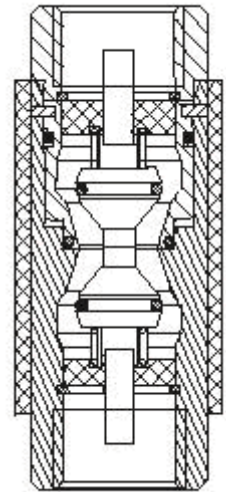

Construction of Breakaways

MD-5 Breakaways are Used for Connecting between the hose and the XIDE-80 nozzle. 2x Integral check valves. When the pull is too strong, the breakaway will be broken and closed automatically to avoid the fuel flowing.

Maximum Pull: 1": 300LBS±0.5%

Flow Range: 1": 0~ 60L/min

Package: 100pcs/carton


Net Weight: 23kgs

Gross Weight: 25kgs

Dimension: 510×280×200mm



MD-5-11 Breakaways

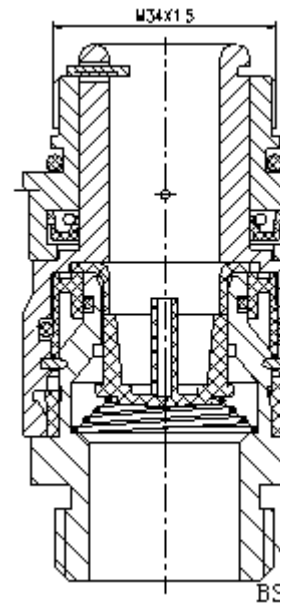

Construction of MD-5-11 Breakaway

Ordering Specification:

